Double Layer Extendable Pole Kit

Installation & Care Instructions

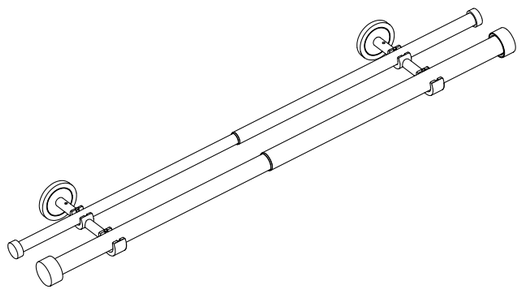

Dunelm

www.dunelm.com

Getting Started

Double Layer Extendable Pole Kit

A. Check you have received all parts supplied listed and the correct quantity of each. Beware that sometimes parts are packaged within the product so not immediately visible after opening.

B. Please check the installation guide section for more details. If anything is missing, stop installing the product and contact our customer service team.

C. Check all parts are intact and undamaged. Any issues, contact our customer service team.

D. Check you have the right tools for the job. Required tools which are not provided are listed overleaf. If you are unsure of how to use these tools, please contact a professional tradesperson. We recommend Airtasker as an easy way to find trades people in your local area.

E. Ensure that all wall plugs and screws provided are suitable for your type of wall/window.

F. We recommend two people to fit longer length poles 240cm and above.

Care Advice

Wipe clean only.

Note:
Modification of the design or configuration of the pole or its integral or non-integral component parts shall not be made without consulting the manufacturer.

7751L-05

Safety Advice

Dunelm

Important Safety Instructions

Dear customer

- **IMPORTANT –** The first step you need to take is to ensure your safety! Please take the time to read and understand these instructions before installing the curtain track.
- Please keep these instructions for future reference.
- This item is intended for indoor use only – unless otherwise specified.
- During installation children should be kept away from the product due to possible risk of injury. The product may contain small parts that could also cause choking if swallowed.
- Products can be dangerous if incorrectly fitted or assembled. Installation should be carried out by a competent person and instructions followed. No liability will be accepted for damage or injury caused by incorrectly installed or assembled products.
- Restrain children from climbing or playing on or around the product. Always consider where products are positioned to ensure children cannot get access to long cords or windows.
- Keep all plastic wrapping materials away from babies and children to avoid danger of suffocation.
- Ensure that all packaging is disposed of carefully and responsibly. Please recycle where possible.
- Once items are part or fully installed, they are not returnable unless faulty.

Tools

Tools required which are not included						
Drill	Cross head screwdriver	Spirit level	Tape measure	Pencil	Hacksaw (if adjusting the track size)	File (if adjusting the track size)
						

Parts and fittings

Ref	Part	Visual	Qty for 70-120cm Pole	Qty for 120-210cm Pole	Qty for 210-360cm Pole
1	pole		4	4	4
2	Bracket		1 x bracket (16mm & 25mm) 1 x bracket (19mm & 28mm)	1 x bracket (16mm & 25mm) 2 x bracket (19mm & 28mm)	1 x bracket (16mm & 25mm) 2 x bracket (19mm & 28mm)
3	*Finial		4	4	4
4	Screws and wall plugs		6	9	9
5	Allen key		1	1	1

*Finial design may vary
Rings are available to purchase separately, use 1 ring per 10cm of pole ensuring an equal amount of rings are used for each curtain

Exploded Diagram

Dunelm

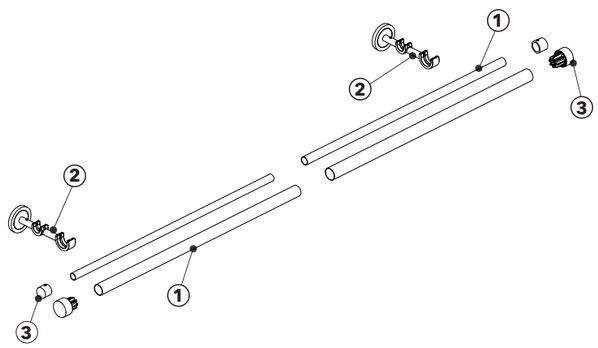

Wall Fixing Guide

Important

When drilling into walls always check there are no hidden wires or pipes etc. Make sure that the screws and wall plugs being used are suitable for supporting your blind. If you are unsure of the below guidance, consult a qualified tradesperson for advice or help.

Hints

A. General Rule; Always use a larger screw and wall plug if you are not sure.

B. Ensure you use the recommended drill bit to match the wall plug and hole size.

C. Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.

D. Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure the plug is fitted below the ceramic tile to avoid splitting or cracking.

E. Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Wall Plug Types		
General purpose fittings provided,but you can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone, wood or plastic board.		
GENERAL PURPOSE	PLASTERBOARD	HAMMER
		
For light loads only. Options available for most wall types.	For light loads only. Attach into plasterboard.	For light loads only. For solid walls covered with plasterboard. Allows the fixing to be attached into brick behind.
CAVITY – LIGHT LOAD	CAVITY – HEAVY LOAD	SHIELD ANCHOR
		
Light load cavity wall plug for use into plasterboard or hollow wooden doors.	Heavy load cavity wall plug for use into plasterboard or hollow wooden doors.	For heavier loads into masonry, brickwork or concrete.

Care and maintenance

Regularly check the fixings to ensure the wall plug or screws have not become loose. Tighten or stop using the product if they have.

Installation Guide

Dunelm

Step 1 - Positioning the brackets:

Mark a line where the bracket's top screw will be. This is usually around 10cm above and 10cm to the side of the window. A pole over 180cm will need a centre bracket, position this in the middle of the pole's length. The installation should be centred with the window if possible.

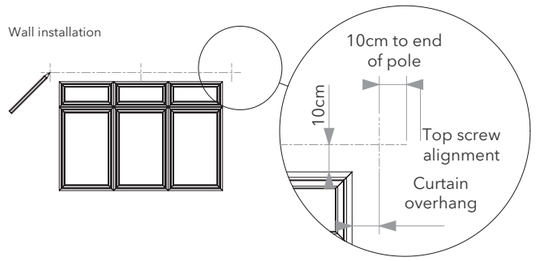

Please note: Always leave 10cm either side of the end brackets for the finial to be placed.

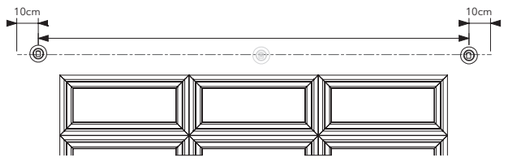

Installation Guide

Step 2 - Fixing the brackets:

Note: Use the correct wall plugs and screws for your wall type. If you are unsure, please consult your local builder's merchant or DIY store.

Mark the fixing hole positions (the backplate can be used as a template). Drill the holes and fit wall plugs if necessary. Install the screws and ensure the plates are aligned. Secure the backplate by tightening the screws. Secure the bracket base by screwing onto the backplate.

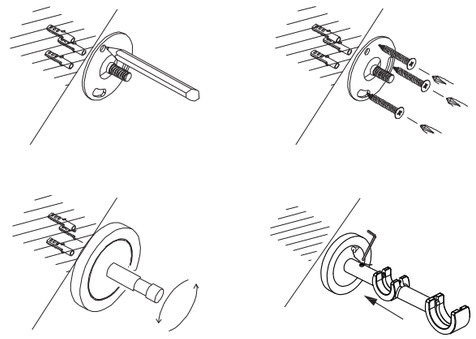

Step 3 - Installing the back pole with tab/voile curtains:

Place the pole(s) in the brackets.Lift one end of the pole and slide the curtain header tab or eyelet onto the pole ensuring that the last curtain header tab or eyelet is placed in between the bracket and the end of the pole. Repeat on the other end of the pole. Secure the finial. Push the pole into the cup until you hear a click.

Note: the smaller diameter poles are to be inserted into the brackets that are labelled with 16mm and 25mm bracket.

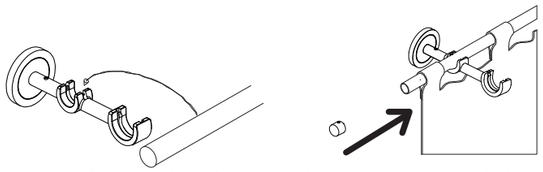

Alternatively, if the poles do not fit easily into the brackets, you can add the bracket arms by pushing them onto the pole first.

Once attached inline with the bracket covers – you can insert them into the covers and tighten the grub screw at the desired length. For longer length poles, you may need 2 people.

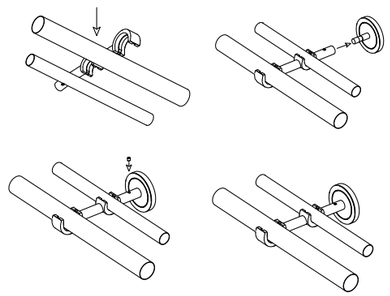

Please note: There will be 1 bracket for the smaller diameter pole. Ensure this is in correct position before proceeding.

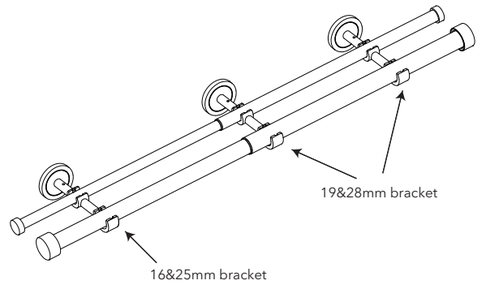

If you have any issues with this product, you can call our **Customer Service** team on: **0345 165 6565** Monday to Friday **9am to 5:00pm.**

Alternatively, you can contact our team by Live Chat on:
Dunelm.com
Monday to Friday 8am – 8:30pm
Saturdays 8am – 5:30pm
Sundays and bank holidays 9am – 4:30pm

Recycle

FSC www.fsc.org
MIX
Paper | Supporting responsible forestry
FSC® C204602

www.dunelm.com

Dunelm (Soft Furnishings) Ltd. LE7 1AD &
Dunelm (Soft Furnishings) Holdings Ltd. Dublin D12 WR25

Manufactured in China