


Perfect Fit Blind

Installation & Care Instructions

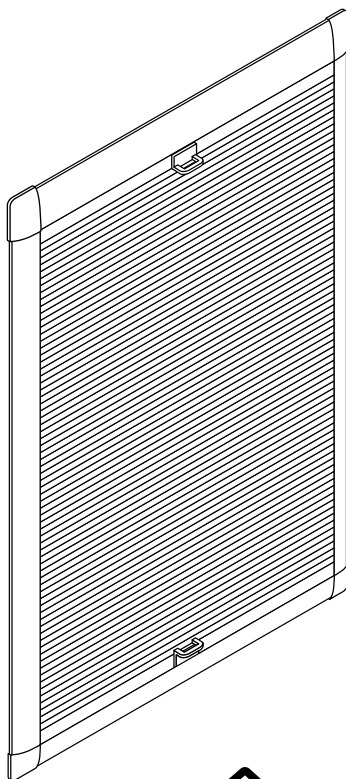

Perfect Fit Blind

Quick and easy installation without the need for special tools.

- A. Check you have received all parts supplied listed and the correct quantity of each. Beware that sometimes parts are packaged within the product so not immediately visible after opening.
- B. Please check the installation guide section for more details. If anything is missing, stop installing the product and contact our customer service team.
- C. Check all parts are intact and undamaged. Any issues, contact our customer service team.
- D. Check you have the right tools for the job. Required tools which are not provided are listed overleaf. If you are unsure of how to use these tools, please contact a professional tradesperson. We recommend Airtasker as an easy way to find trades people in your local area.

Care Advice

Wipe clean only.

This blind is maintenance free.

Note Modification of the design or configuration of the blind or its integral or non-integral component parts shall not be made without consulting the manufacturer. Use of the additional safety device helps reduce the risk of strangulation but cannot be considered completely fool proof.

Please keep these instructions and batch code from packaging for future reference.




Important Safety Instructions


Dear customer


- **IMPORTANT** - The first step you need to take is to ensure your safety! Please take the time to read and understand these instructions before installing the blind.
- This item is intended for indoor use only - unless otherwise specified.
- The installation can be completed by non-professionals.
- During installation children should be kept away from the product due to possible risk of injury.
- PLEASE KEEP OUT OF THE REACH OF YOUNG CHILDREN.
SMALL PARTS - CHOKING HAZARD.
- Always use a Step Ladder when working at height.
- We recommend you use two people for the installation of larger blinds.
DO NOT over-reach. DO NOT hold or lean on the blind to support your weight.
- Products can be dangerous if incorrectly fitted or assembled. Installation should be carried out by a competent person and instructions followed.
- No liability will be accepted for damage or injury caused by incorrectly installed or assembled products.
- Keep all plastic wrapping materials away from babies and children to avoid danger of suffocation.
- Ensure that all packaging is disposed of carefully and responsibly.
Please recycle where possible.

Tools required which are not included

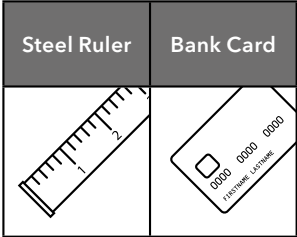

Parts Supplied For Track


Ref	Part	Visual	Qty
1	Main Cellular Blind		1
2	Side Extrusions		2
3	Corner Finishing Covers		4
4	Brackets		4

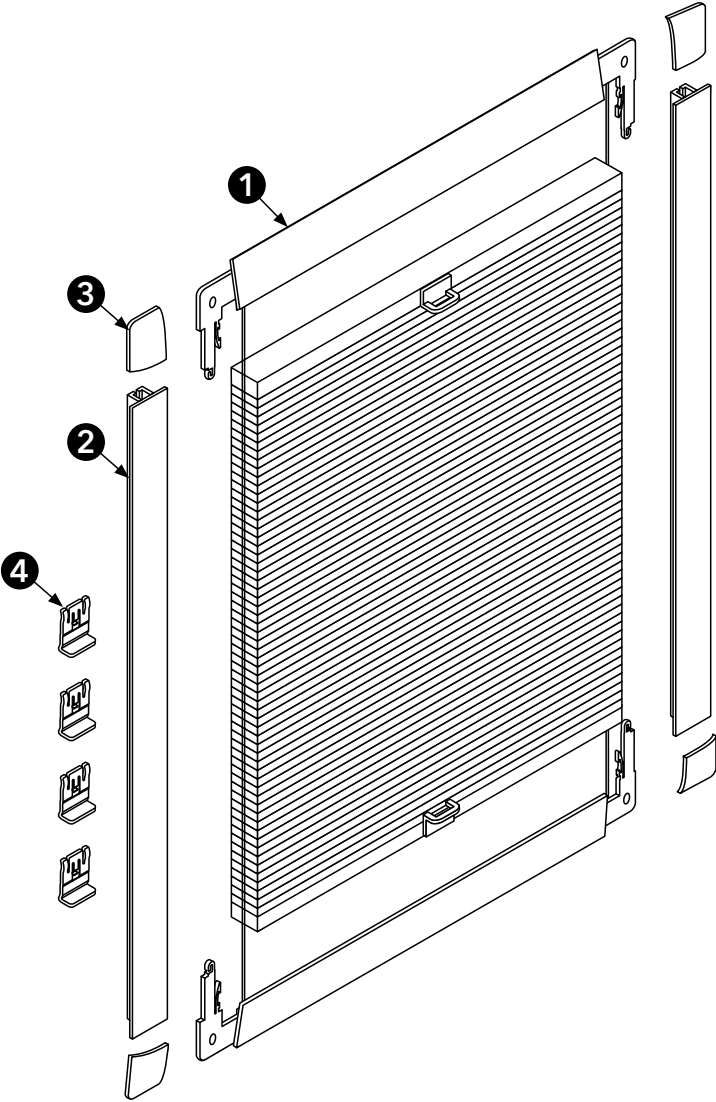

Important

Perfect Fit Pleated made to measure blinds are designed for UPVC windows with a visible rubber seal, so first please check your window is suitable for these blinds.

Start by measuring the rubber seal to make sure it's less than 5 mm from the frame to the glass. If it measures under 5mm you can continue measuring the window, ensuring you measure from rubber seal to rubber seal and not from the outer edge. You'll need to check if there's any obstructions around the window. **If there is an obstruction, like a handle for instance, make sure it's at least 25mm away from the edge of the rubber seal.**

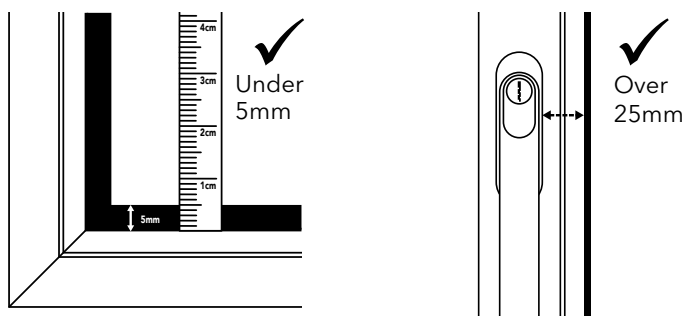


The **Perfect Fit** frame extends around 12mm from your window frame so please check that your window handles can turn without hitting it.


Perfect Fit blinds aren't suitable for sliding doors or windows, and may also prevent bi-folding doors from closing completely flat down to the **Perfect Fit** frame depth.

1. Measuring your window glass

Using a steel tape measure, you'll need to measure the width at three points in the window glass - starting from the bottom, middle and then top. And note down the smallest measurement of the three, accurate to the nearest millimetre. Now you can do the same for the drop of the blind.

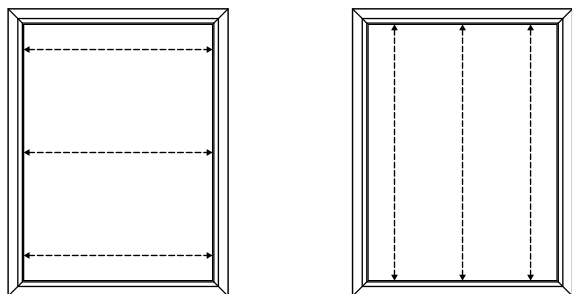


You should measure right up to the edge for both flat square and chamfer, but if you have a flat square window edge we recommend you deduct 4mm from your final smallest width & drop measurements. If you're unsure at all please contact our stores or Virtual Consultants.

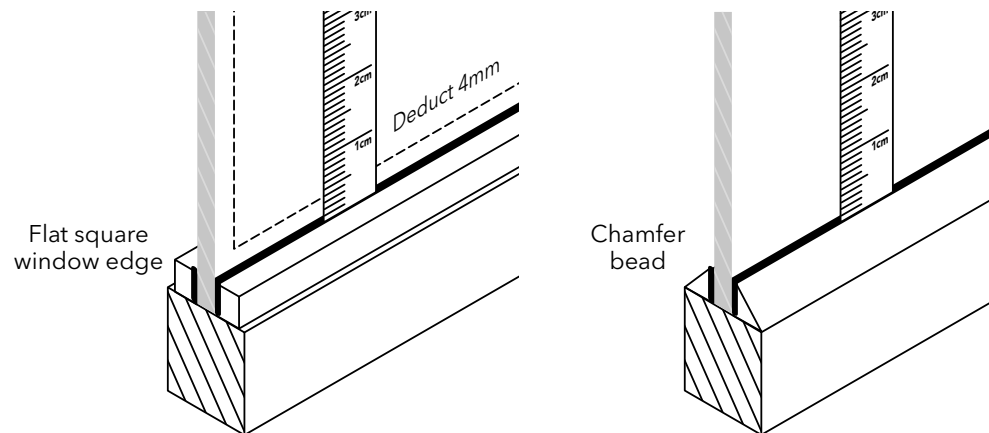

2. Measuring your frame depth


Measure your frame depth from the glass to the edge of the window frame to make sure we can provide you the right sized bracket, to do this place your card over 1 corner of the frame then measure from the glass to the edge of the card.

Use this measurement to select your window frame depth. We offer 8 frame depth sizes from 18-32mm. If your measurement does not fall exactly with one of the available sizes, then go for the next size up.

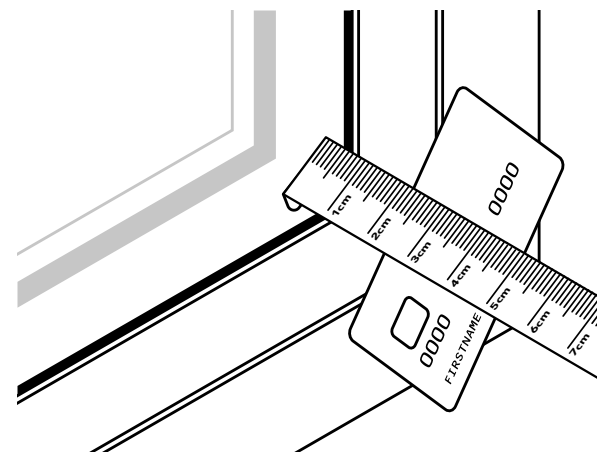


1. Assembling the frame


- A. Lay all parts of the frame/blind out face down on a clean even surface. Your blind will be attached to the top and bottom parts of the frame by side guide cords.

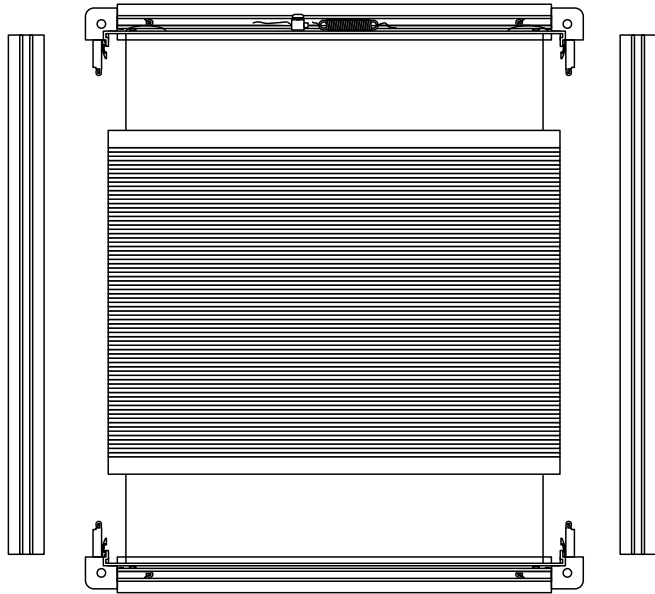


- B. Connect the left-hand side of the frame to the exposed arm on the top left-hand corner joint until it you hear a click and it feels secure. Repeat the process on the top right-hand corner joint. Follow the same procedure for the bottom-left and bottom-right sides of the frame.

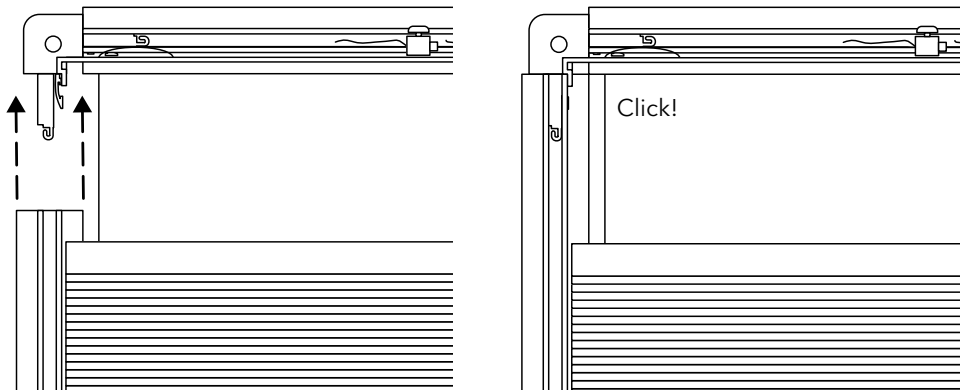

- C. If necessary, re-attach the cord onto the spring. Test operation of blind. If the tension needs to be adjusted, loosen the screw in the locking ring. To increase tension make the cord shorter. To reduce tension make the cord longer and tighten the screw in the locking ring.

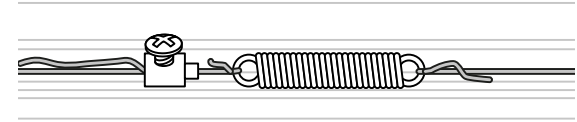


- D. Attach the corner covers. Press corner covers firmly into place, making sure that you line up the holes, until you hear them click into place. Corner covers can also be reattached to the frame, once the blind is installed into the window, if necessary.

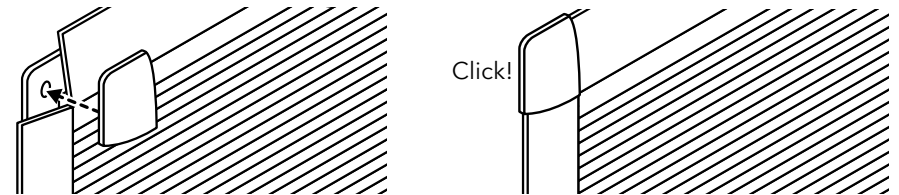

2. Installing the brackets

- A. First, you'll need to install your brackets into each corner of the window. Use a credit/debit card as a template to find the correct position for the brackets.
- B. Place the card lengthways along the side of the window in each corner, and line up the bracket with the end of the card as shown.

You need to push the brackets between your window pane and the rubber window seal.

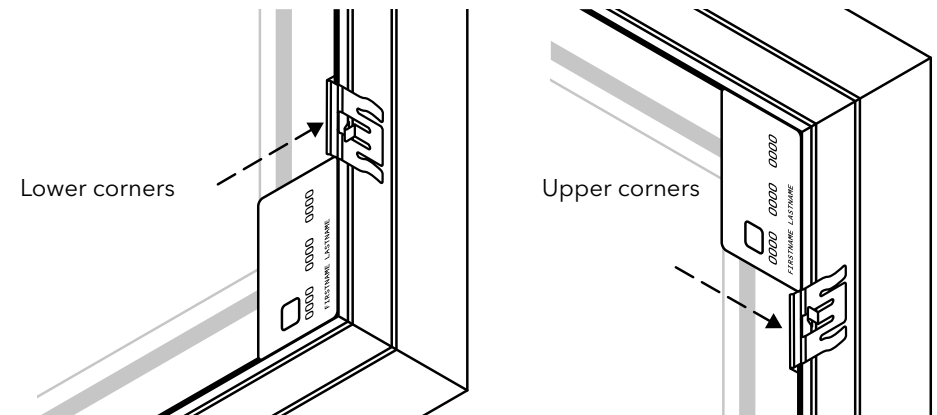


- C. Fit any intermediate brackets accordingly. Two extra brackets will be supplied for blinds over 110cm drop, these should be positioned approx mid way down the drop of the blind one on each side. These need to be lined up with the bracket hole positions on the **Perfect Fit** frame.

NOTE: If you find that the brackets are difficult to place behind the window seal, you can use some washing up liquid as lubricant on the flat part of the bracket. Once all the brackets are fitted, clean any excess from the window surface.


4. Installing the blind

- A. Going from top to bottom, clip your frame onto the brackets on either side of the window.

NOTE: The frame may land on the wrong side of the bracket, so make sure the bracket slides behind the frame edge and the bracket tab locates the frame hole securely. Once all four corners are securely attached, check your Perfect Fit Blind is sitting level and square in the window recess.

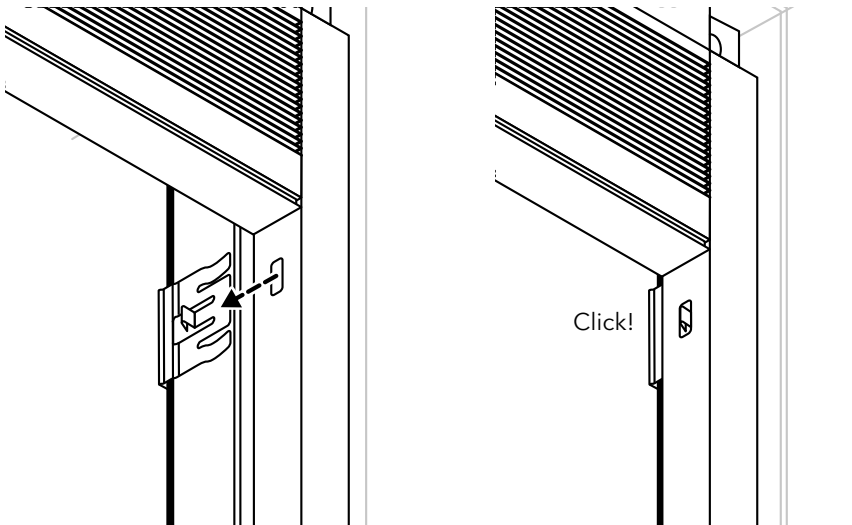


You'll need to check the operation of the blind and the window. The window still opens and closes with the blind attached.

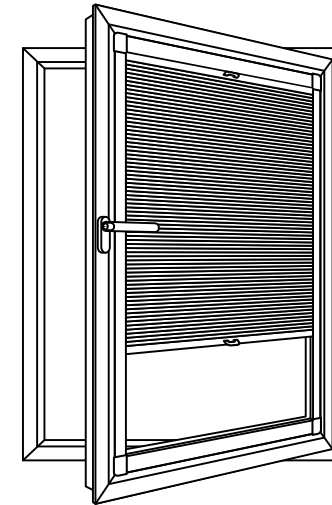


4. Operating the blind

The blind will operate by gently applying pressure to the upper or lower blind bar to raise up and down.

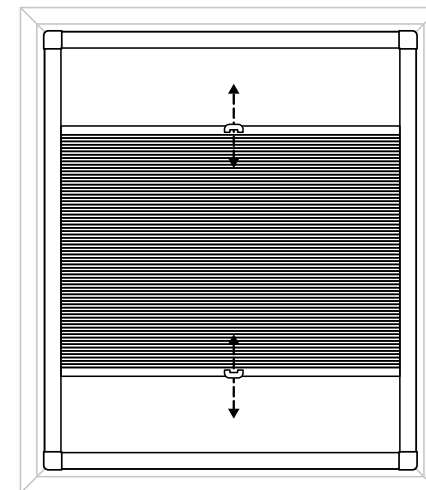

CHILD SAFETY WARNING

- Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.
- To avoid strangulation and entanglement, keep cords out of the reach of young children.
- Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords.
- Do not tie cords together.
- Make sure cords do not twist and create a loop.
- PERSONS IN CHARGE OF CHILDREN ARE ULTIMATELY RESPONSIBLE FOR FOLLOWING THE SAFETY INSTRUCTIONS PROVIDED BY THE MANUFACTURER AND TO USE ANY SAFETY DEVICE SUPPLIED.

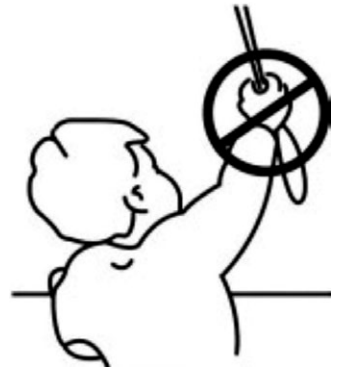

Customer Service Centre

If you have any issues with this product, you can call our **Customer Service** team on: **0345 165 6565** Monday to Friday **9am to 5:00pm**.

Alternatively, you can contact our team by Live Chat on:

Dunelm.com

Monday to Friday 8am - 8:30am

Saturdays 8am - 5:30pm

Sundays and bank holidays 9am - 4:30pm

Dunelm
www.dunelm.com

Dunelm (Soft Furnishings) Ltd. LE7 1AD &
Dunelm (Soft Furnishings) Holdings Ltd. Dublin D12 WR25

Manufactured in United Kingdom