


Magnetic Roman Blind

INSTRUCTIONS

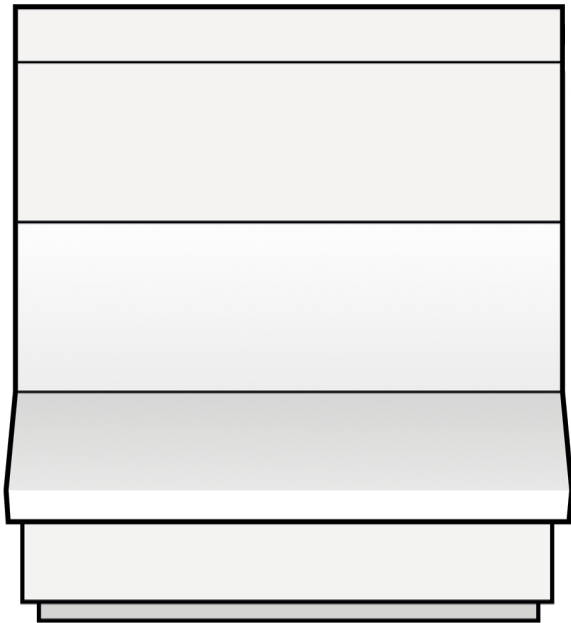

www.dunelm.com

← UNFOLD FOR FULL INSTRUCTIONS →

CHILD SAFETY WARNING

PERSONS IN CHARGE OF CHILDREN ARE ULTIMATELY RESPONSIBLE FOR FOLLOWING THE SAFETY INSTRUCTIONS PROVIDED BY THE MANUFACTURER AND TO USE ANY SAFETY DEVICE SUPPLIED.
The installation can be completed by non-professionals.

Safety Recommendations

- Always use a Step Ladder when working at height.
- We recommend you use two people for the installation of larger blinds.
- DO NOT over reach. DO NOT hold or lean on the blind to support your weight. Always move the Step Ladder so that you are in a safe working position.
- Take care when using power tools, use of a Residual Current Device (RCD) is recommended. Always use eye protection when drilling. Beware of hidden pipe runs and cables.
- No liability will be accepted for damage or injury caused by incorrectly installed or assembled product.

PLEASE KEEP OUT OF THE REACH OF YOUNG CHILDREN. SMALL PARTS - CHOKING HAZARD.

Please keep these instructions and batch code from packaging for future reference.

www.dunelm.com

Important



Important Safety Instructions

Read these instructions carefully before installing this blind. Keep these instructions for future reference.





Small parts can present a choking hazard if accidentally swallowed. Keep small parts away from young children.

Ensure that all wall plugs and screws provided are suitable for your type of wall/window. If in doubt consult a professional.

Modification of the design or configuration of the blind or its integral or non-integral component parts shall not be made without consulting the manufacturer.





This blind is maintenance-free.

Kit content

Visual	Qty
Pivot End Plug 	2
Fixing bracket and cover 	2
Screws 	4
Wall plugs 	4

Tools required

Take care when using the tools. Wear gloves and eye protection.

Visual	Qty
Pencil 	1
Screw driver 	1
Drill 	1
Spirit Level 	1


Care advice

Wipe clean only


Installation guidance

Fitting the brackets inside the recess

Remember to allow room for the pivot end plugs and your brackets when fitting inside the window recess to aid smooth operation.

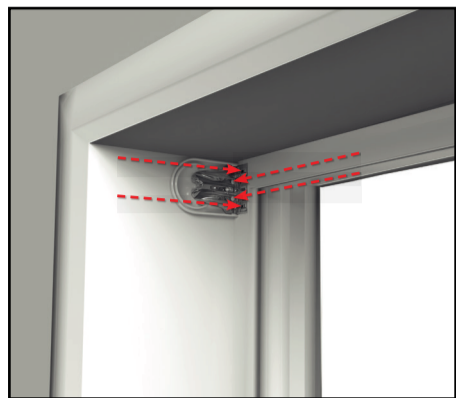

FACE FIX ← = Fixing Options

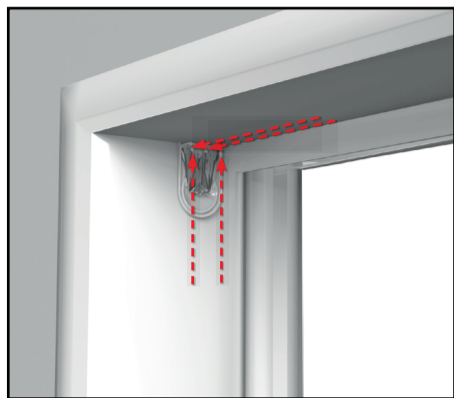


TOP FIX ← = Fixing Options

A. INSIDE THE RECESS

1. When fitting the brackets, they need to be fixed 30mm wider, (15mm each side) than the blind width you have purchased. Your measurement should be to the outside of the bracket covers.
2. Mark the screw holes with a pencil.
3. Drill the holes.
4. Insert wall plugs into the holes, add the bracket and screw into place.
5. Repeat for the second bracket at the other side.
6. Ensure brackets are level using a spirit level.

Fitting the brackets outside the recess

Aim to leave some clearance between the recess and the bracket, both vertically and horizontally to ensure the fabric overlaps the window recess evenly.

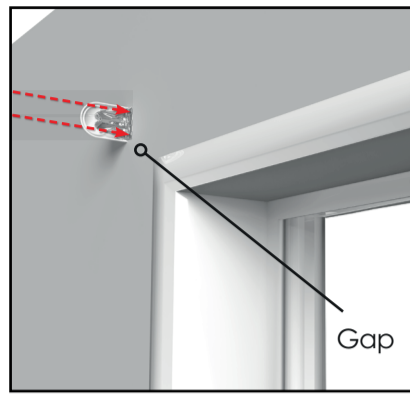

← = Fixing Options

B. OUTSIDE THE RECESS

1. When fitting the brackets, they need to be fixed 30mm wider, (15mm each side) than the blind width you have purchased. Your measurement should be to the outside of the bracket covers.
2. Mark the screw holes with a pencil.
3. Drill the holes.
4. Insert wall plugs into the holes, add the bracket and screw into place.
5. Repeat for the second bracket at the other side.
6. Ensure brackets are level using a spirit level.




FITTING THE BLIND TO THE BRACKETS

Now the brackets are in place:

1. Push the pivot ends into the left and right side of the blind.
2. Place the left or right pivot end into the bracket and compress the spring at the opposite end, locate the second bracket and push into place.

Operating the blind

To open the blind, starting at the bottom first, manually place each panel behind the one above allowing the magnet rod to connect and hold in place. Continue panel by panel until the desired length position is achieved. To close the blind, gently pull the panels down to release the magnets.

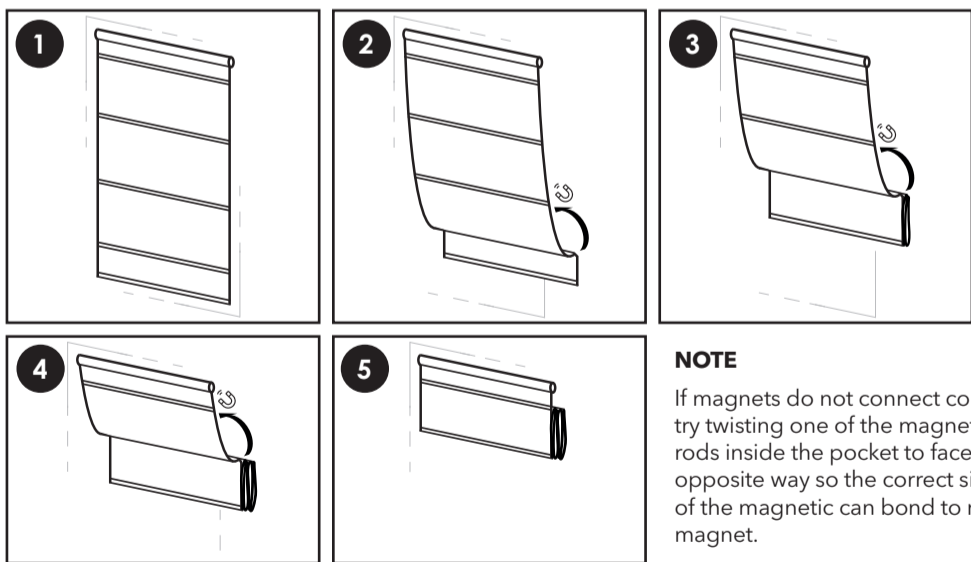


NOTE

If magnets do not connect correctly try twisting one of the magnetic rods inside the pocket to face the opposite way so the correct side of the magnetic can bond to next magnet.

Wall fixings

Step by step



Important

When drilling into walls always check there are no hidden wires or pipes etc. Make sure that the screws and wall plugs being used are suitable for supporting your blind. Consult a qualified tradesperson if you are unsure.

Hints

1. General Rule; Always use a larger screw and wall plug if you are not sure.
2. Ensure you use the recommended drill bit to match the wall plug and hole size.
3. Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
4. Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure the plug is fitting below the ceramic tile to avoid splitting or cracking.
5. Ensure wall plugs are well fitted and are a tight fit in the drilled hole.


Wall fixings

Types of Walls

You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone, wood or plastic board.

1. STANDARD Wall Plug


General wall materials



These come in various sizes and are made from plastic or sometimes wood fibre.

2. GENERAL PURPOSE Wall Plug


Aerated/Breeze block



Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, a General Purpose Plug can be used.

3. SHIELD ANCHOR Wall Plug


Heavy loads



For use with heavier loads such as TV & Hi-fi Speakers and Satellite Dishes etc.

4. CAVITY FIXING Wall Plug


Wall Plug



For use with plaster board partitions or hollow wooden doors.

5. CAVITY FIXING HEAVY DUTY Wall Plug


Wall Plug



For use with plaster board partitions or hollow wooden doors.

6. HAMMER FIXING Wall Plug

Wall Plug



For use with walls stuck with plaster board. The hammer fixing allows it to be fixed to the wall rather than the plaster board. Always check the fixing is secure to the retaining wall.

Care and Maintenance

⚠ Safety

Always check the fitting and location to ensure your safety in and around the home.

⚠ Fitting

From time to time check the fitting to ensure the wall plugs or screws do not become loose.

- Please ensure that you use fittings that are suitable for your wall type (see wall fixings information for a general guide).
- Please ensure that the head of the screws used has a diameter greater than the diameter of the hole on the wall fixing and that the fixing is safe and secure before using.
- When drilling into the walls, always ensure there are no hidden wires or pipes.
- If you are unsure, we recommend you consult a qualified Trades person.