

Safety and Care Advice


IMPORTANT - The first step you need to take is to ensure your safety!
Please take the time to read and understand these instructions before assembling your light, and retain for future reference.

Ensure that your pendant wiring is clamped correctly both in the ceiling and in the lampholder, and that the cable is in good condition. We recommend that it is at least 100mm in length.

This fitting can be fitted to either a E27/ES or a B22/BC type lampholder by using the shade reducer ring.

- Before installing your light fitting always switch off the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation.
- If you are in any doubt about your competence please consult a qualified electrician.
- If any modification is made it will invalidate the warranty and may render the product unsafe.
- You may find it easier to install with the help of an assistant.

List of parts supplied:



These assembly diagrams are intended as a guide – if in doubt consult a qualified electrician.

1. Unpack the shade and familiarise yourself with the parts provided.

2. Remove the shade fixing ring (E) from the lampholder.

3. If your current pendant lampholder is a standard bayonet lampholder (B22/BC) the shade reducer ring (C) inside the gimbal (D) will need to be fitted to reduce the shade hole size. If your current pendant lampholder is an Edison Screw (E27/ES) or a specialist lampholder there is no need to use the shade reducer ring. It should still be kept in case the pendant is moved to another lampholder.

4. Place the top shade (A) over the threaded lampholder, followed by the large shade (B).


5. Place the gimbal (D) into the shade and secure in place with the shade ring (E).

6. Install the bulb (F) Max. 15W LED E27 or B22 GLS.

NOTE: Do not install bulbs with a greater wattage or different shape than specified on the label.

7. Fit the top cap (G) by screwing onto the bottom of the gimbal in a clockwise direction. Tighten to secure.

8. Turn on and test.

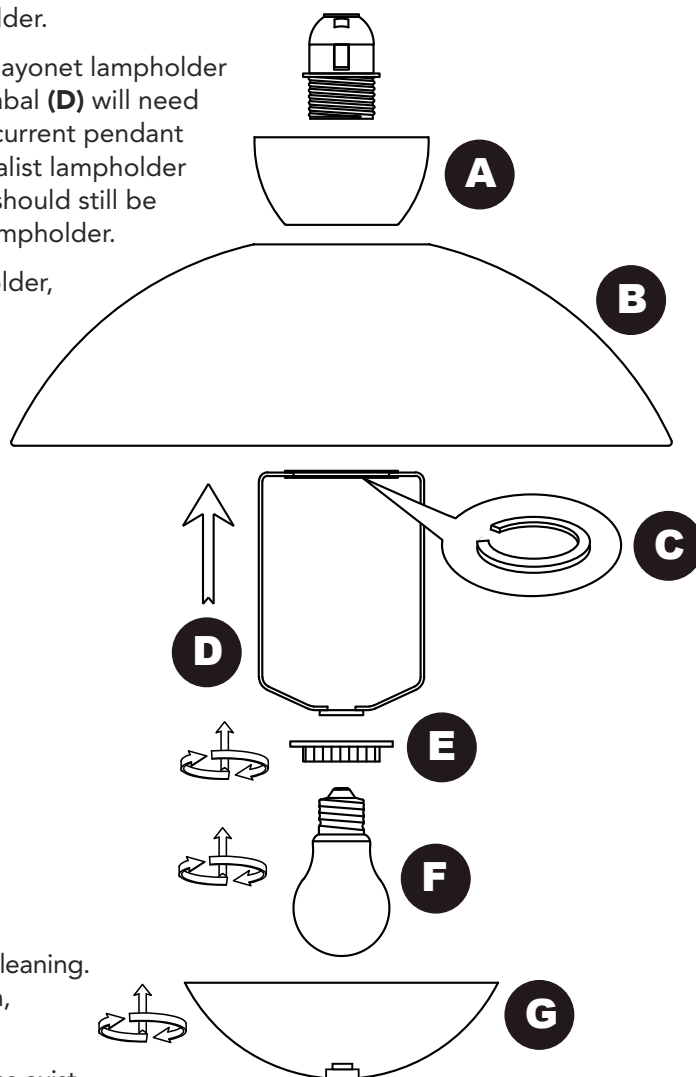

Care and Maintenance Advice

In order to prevent damage or wear to your fitting, take care to ensure the following:

Allow 10 minutes to cool before replacing, adjusting or cleaning.

Clean with a dry cloth only. In order to preserve the finish, do not use liquid or abrasive cleaners on this product.

Our packaging is recyclable, please recycle where facilities exist.

Finally, we hope you enjoy your light for many years to come and thanks again for your purchase.

dunelm.com

Manufactured in China for
Dunelm (Soft Furnishings) Ltd. LE7 1AD
& Dunelm (Soft Furnishings)
Londonderry Ltd. BT48 8QN

03092024
30869717_30869718
30869719_30869720_30921741